



# WEE Technology Company Limited

## Ultra-Fast Recovery Rectifiers

SF21G THRU SF28G


VOLTAGE RANGE 50 to 600 Volts  
CURRENT 2.0 Ampere

### FEATURES

- Glass passivated chip junction
- Super fast speed switching speed
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High reliability
- High temperature soldering guaranteed  
260°C/10 seconds, 0.375"(9.5mm) lead length at 5 lbs(2.3kg) tension

### MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any

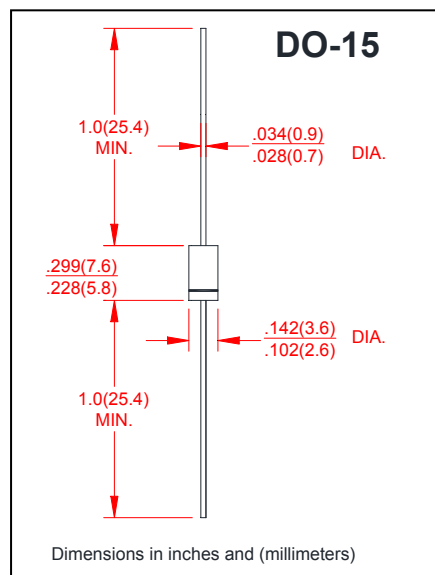

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

Catalog Number	SYMBOLS	SF21G	SF22G	SF23G	SF24G	SF25G	SF26G	SF28G	UNITS	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	150	200	300	400	600	Volts	
Maximum RMS Voltage	$V_{RMS}$	35	70	105	140	210	280	420	Volts	
Maximum DC Blocking Voltage	$V_{DC}$	50	100	150	200	300	400	600	Volts	
Maximum Average Forward Rectified Current at $T_A=55^\circ\text{C}$	$I_{(AV)}$	2							Amps	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	60							Amps	
Maximum Instantaneous Forward Voltage at 2.0A	$V_F$	0.95			1.25		1.7		Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A = 25^\circ\text{C}$	5							$\mu\text{A}$	
	$T_A = 100^\circ\text{C}$	100								
Maximum Reverse Recovery Time (NOTE1)	$T_{RR}$	35								nS
Typical Junction Capacitance (NOTE 2)	$C_j$	30				20				pF
Typical TSFmal Resistance (NOTE 3)	$R_{\theta JA}$	50							$^\circ\text{C}/\text{W}$	
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$	

#### Notes:

- 1.Reverse Recovery Test Conditions:  $I_f=0.5\text{A}, I_r=1.0\text{A}, I_{rr}=0.25\text{A}$ .
- 2.Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.
- 3.Thermal Resistance From Junction to Ambient at .375"(9.5mm) lead length, P.C. board mounted.



# WEE Technology Company Limited

## Ultra-Fast Recovery Rectifiers

SF21G THRU SF28G

VOLTAGE RANGE 50 to 600 Volts  
CURRENT 2.0 Ampere

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

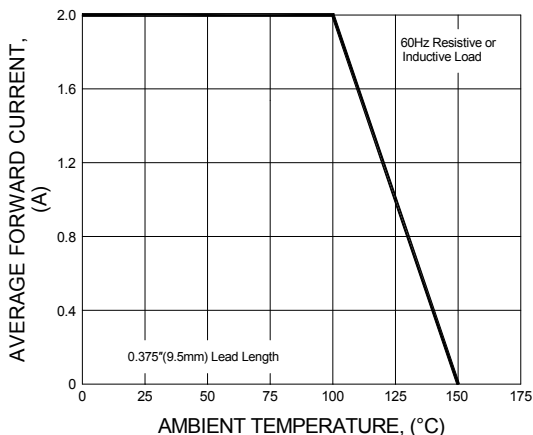


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

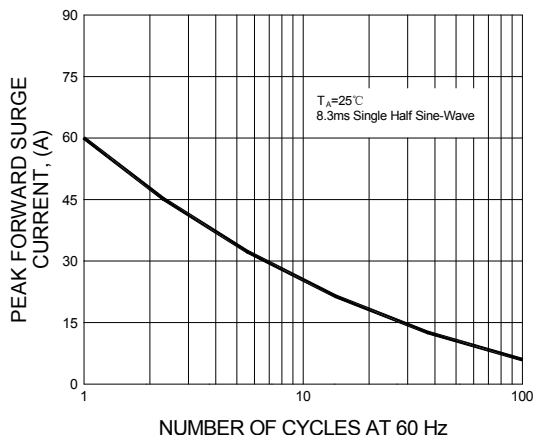


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

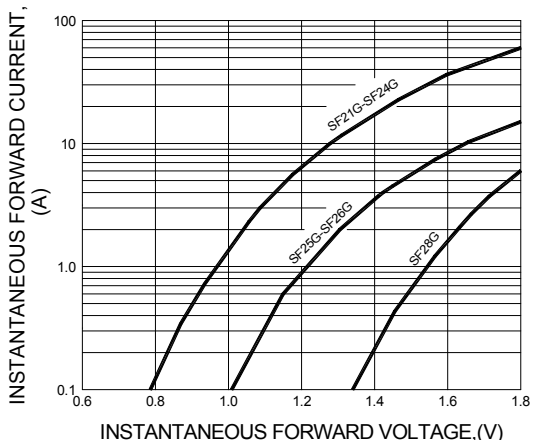


FIG.3-TYPICAL REVERSE CHARACTERISTICS

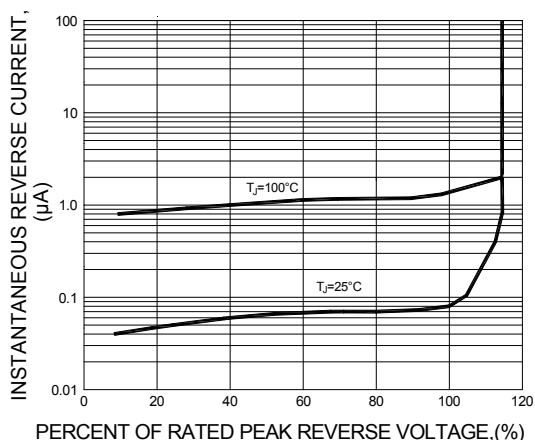


FIG.5-TYPICAL JUNCTION CAPACITANCE


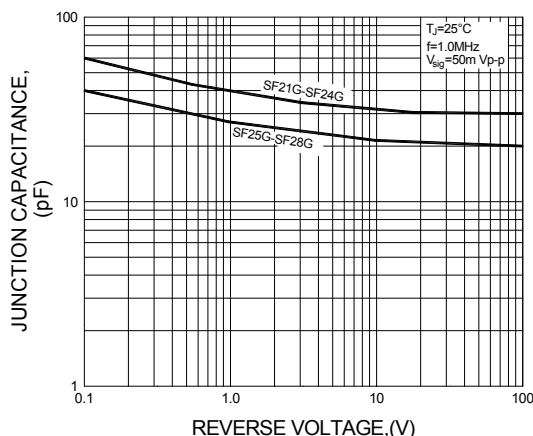


FIG.6-TEST CIRCUIT DIAGRAM AND FORWARD SURGE CURRENT

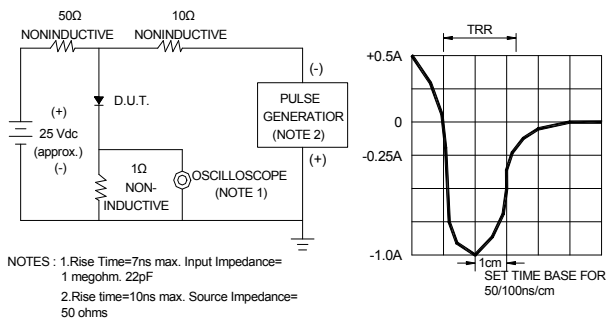

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.