



# WEE Technology Company Limited

## Schottky Barrier Rectifiers

SS22 THRU SS210


VOLTAGE RANGE 20 to 100 Volts  
CURRENT 2.0 Ampere

### FEATURES

- Low profile surface mount package
- Built in strain relief
- High switching speed
- Low voltage drop, high efficiency
- For use in low voltage high frequency inverters, Free willing ,and polarity protection applications
- Guardring for over voltage protection

### MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead :Solder plated, solderable per MIL-STD-750 method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.003 ounce, 0.093 gram

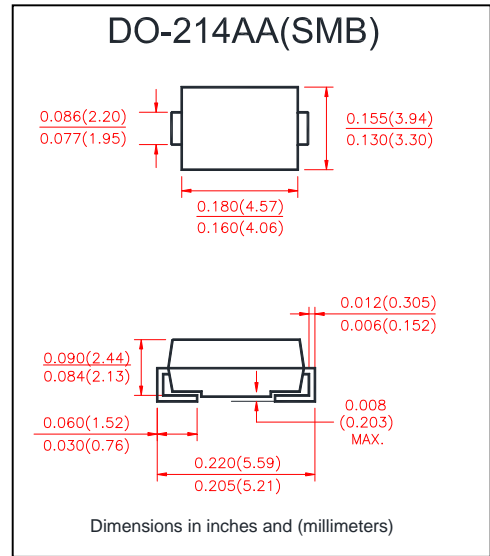

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%.

	SYMBOLS	SS22	SS23	SS24	SS25	SS26	SS28	SS29	SS210	UNIT	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	90	100	Volts	
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	56	63	70	Volts	
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	90	100	Volts	
Maximum Average Forward Rectified Current at $T_L$ see figure 1 $T_L=105^\circ\text{C}$	$I_{(AV)}$	2.0								Amps	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	50								Amps	
Maximum Instantaneous Forward Voltage @ 2.0A(Note1)	$V_F$	0.55			0.70		0.85			Volts	
Maximum DC Reverse Current at rated DC Blocking Voltage per element	$T_A = 25^\circ\text{C}$	0.5								mA	
	$T_A = 100^\circ\text{C}$	20.0			10.0						
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	55								$^\circ\text{C}/\text{W}$	
	$R_{\theta JL}$	12									
Operating Junction Temperature	$T_J$	(-55 to +125)				(-55 to +125)					$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	(-55 to +125)									$^\circ\text{C}$

#### Notes:

1. Pulse test:300  $\mu\text{s}$  pulse width,1% duty cycle
2. PCB mounted with 0.2"  $\times$  0.2"(5.0mm  $\times$  5.0mm)copper pads



# WEET Technology Company Limited


## Schottky Barrier Rectifiers

SS22 THRU SS210


VOLTAGE RANGE 20 to 100 Volts  
CURRENT 2.0 Ampere

### RATINGS AND CHARACTERISTIC CURVES


F1G.1-FORWARD CURRENT DERATING CURVE

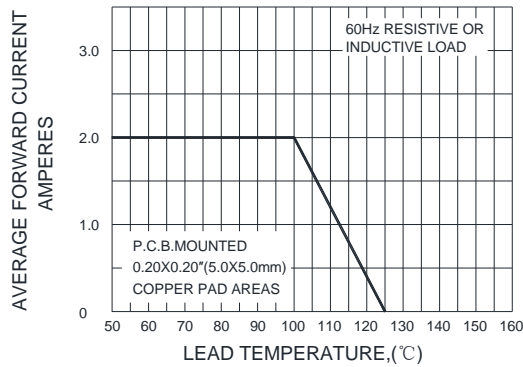


F1G.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

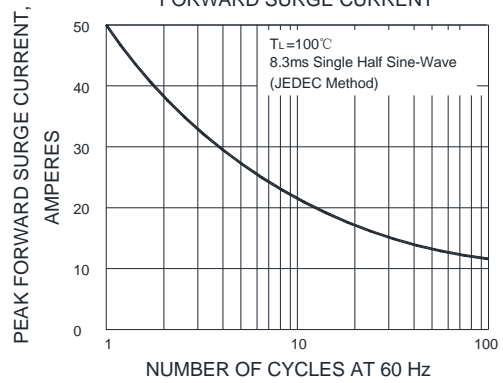


F1G.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

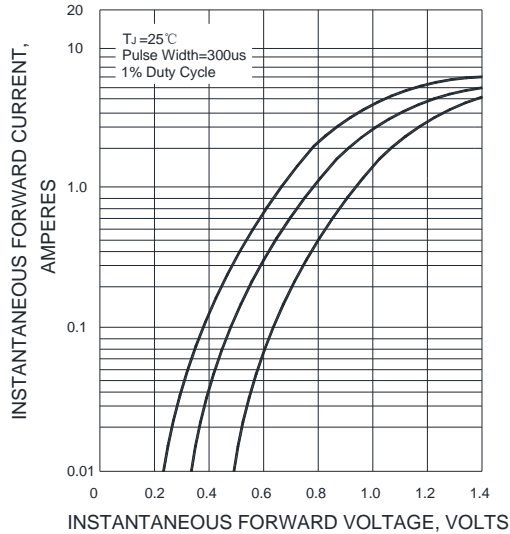

F1G.4-TYPICAL REVERSE CHARACTERISTICS

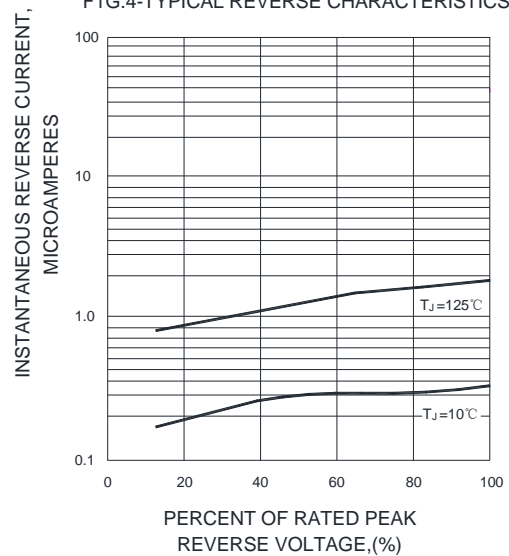

F1G.5-TYPICAL JUNCTION CAPACITANCE

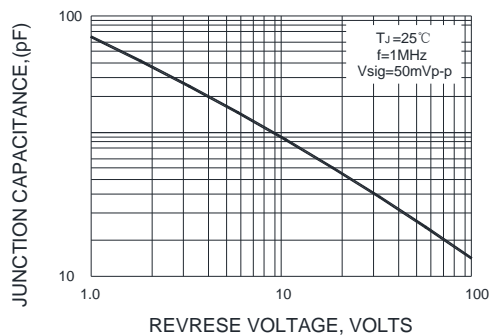

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.